


## SPECIFICATIONS:

Nominal Voltage:	1.4V
Rated Capacity:	270mAh
	at 1500Ω
	to 0.9V
	at 25°C RH 60%
Average weight:	0.84g
Volume:	0.25cm <sup>3</sup>
Terminals:	FLAT
Operating Temp. Range:	0°C to 50°C
Impedance:	≤ 4Ω
	at AC 1000Hz
Limiting Current:	8mA
	@1.1V
IEC:	PR48

## DISCHARGE CHARACTERISTICS AT 1500Ω 25°C 60%RH

(Discharged 24 hours /day)

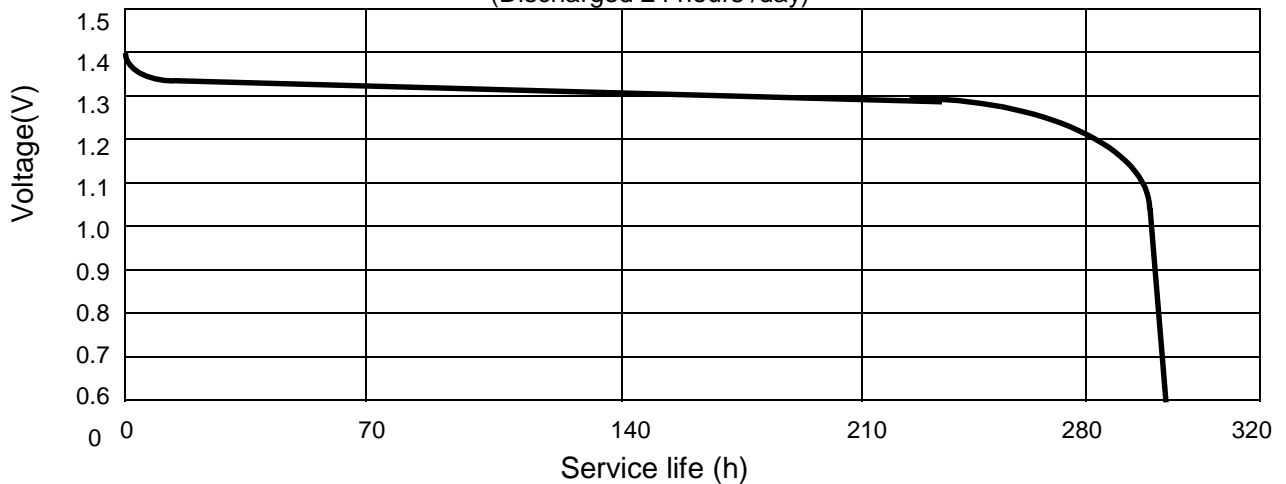

### Zhuhai Zhi Li Battery Co., Ltd.

7/F, Bldg.10, Xiang Zhou North Ind. Park,  
Zhuhai, GD 519002, China

E-mail: [info@zeni power. com](mailto:info@zeni power. com)

Home Page: [www. zeni power. com](http://www. zeni power. com)

Tel: +86-756-2526620 Fax: +86-756-2526630

This data sheet is subject to change without prior notice.  
Contact us for the latest information. Contents here do not  
constitute a warranty. April, 2004