
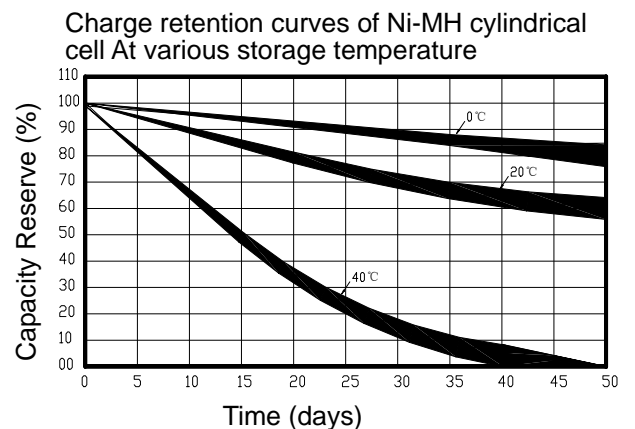
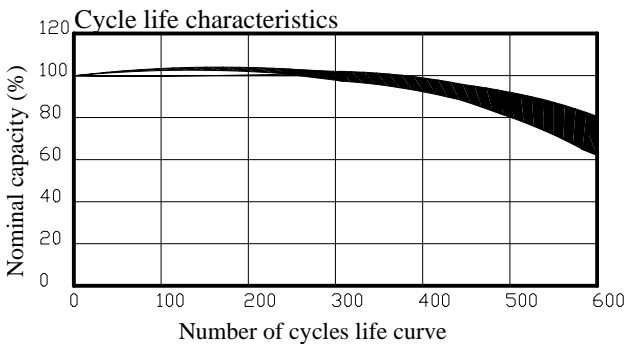
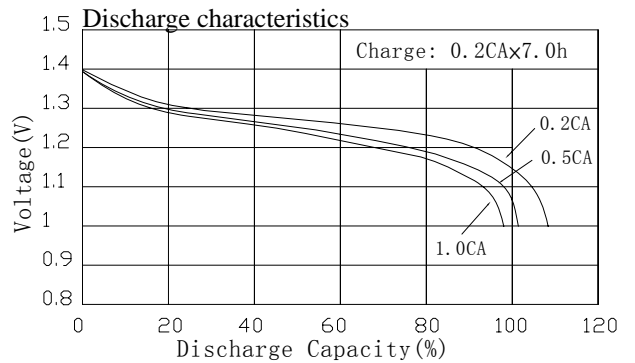
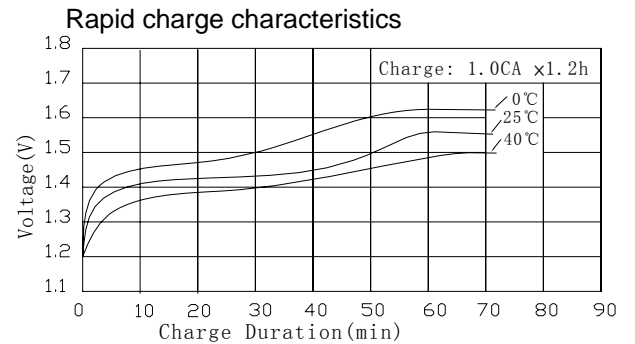


TYPE: H600-3/5F6S Nickel Metal Hydride Cell


Specifications of single cell

Nominal voltage		1.2V		
Capacity		0.2CA	1.0CA	
		Discharge	Discharge	
	Typical	315min	58min	
	Minimum	300min	54min	
Dimensions		mm		
	Height	34.0 ^{-1.0}		
	Width	16.0 ^{-1.0}		
	Thickness	6.3 ^{-0.7}		
Weight(Approximately)		gram		
		13.5		
Internal Impedance At 1000 Hz		≤30mΩ (After Charge)		
Charge	Standard	60mA(0.1CA)×16h		
	Rapid	600mA(1.0CA)×1.2h		
Ambient temperature	Charge		°C	
		standard	0°C to 45°C	
		Rapid	10°C to 40°C	
	Discharge		-20°C to 65°C	
	Storage		-20°C to 45°C	

Typical characteristics

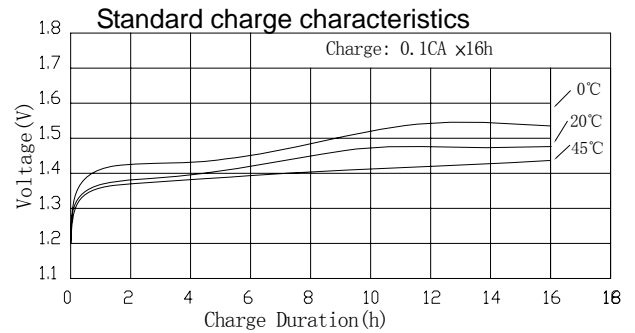

Dimensions with tube

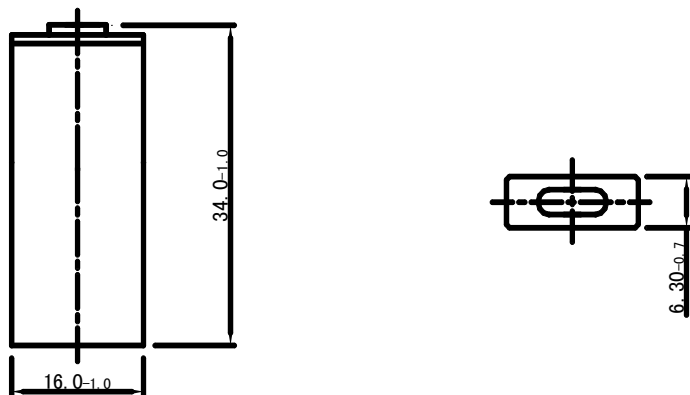

Note:

1. Nominal capacity, rated at 0.2C 20°C.
2. Average capacity, for reference only.
3. Weight and internal impedance are For reference only.
4. Standard according as IEC of test cycle life.