



12V

36W

SLA

UPS
AGM

12SB36WHR

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage	12V	
Nominal Power	10 min rate 15 min rate	
	36W/cell to 1.60V/cell	28W/cell to 1.60V/cell
Nominal Capacity	20 hour rate (0.350A to 10.50V) 7Ah	
	10 hour rate (0.665A to 10.50V) 6.65Ah	
	5 hour rate (1.190A to 10.20V) 5.95Ah	
	1C (7A to 9.60V) 4.43Ah	
	3C (21A to 9.60V) 2.8Ah	
Weight	Approx. 2.24kg	
Internal Resistance (at 1KHz)	Approx. 19mΩ	
Maximum Discharge Current (5 secs)	105A	
Charge Methods at 25°C	Standby Use	
	Float Charging Voltage	13.5V to 13.8V
	Coefficient	-3.0mV/°C/Cell
	Maximum Charging Current	2.16A
Operating Temperature Range	Charge -15°C to 40°C	
	Discharge -15°C to 50°C	
	Storage -15°C to 40°C	
Charge Retention (Shelf Life) at 20°C	1 month 92%	
	3 months 90%	
	6 months 80%	
Case Material	ABS UL94 HB	
Termination	F2 (Faston Tab 250)	
Design Life	3-5 years	

Classified as a non-spillable battery.
Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode







9319632520376




DIMENSIONS

mm (inch)

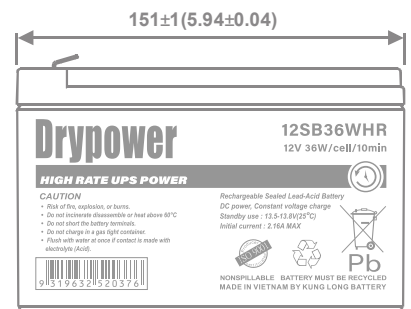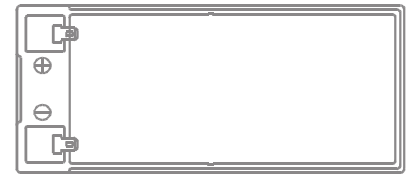


(v) FOR 12V BATTERY Discharge Time VS. Discharge Current (25°C)

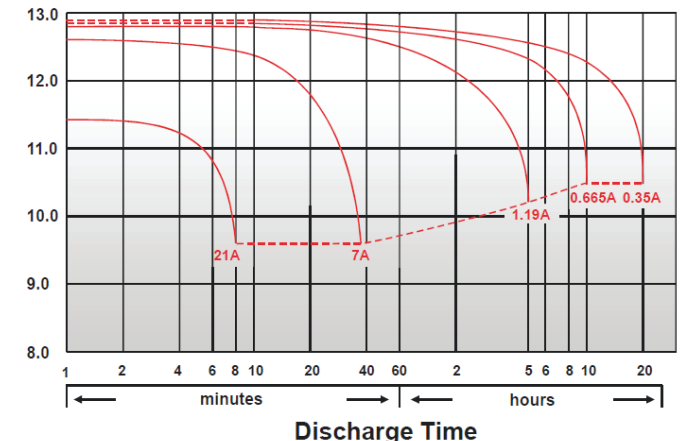


CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

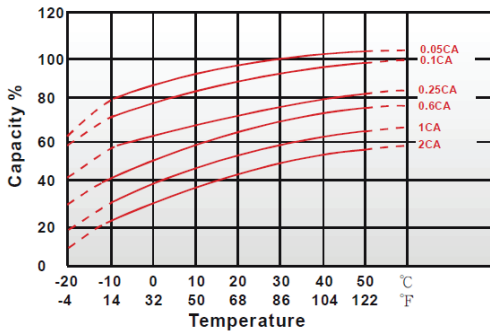

Capacity Retention Characteristic

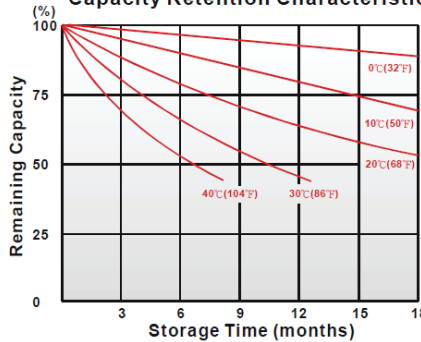

Trickle (or float) Service Life



FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Specially formulated solder paste to ensure reliable power delivery.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Special grid frame alloy design with outstanding anti-corrosion performance.
- ◆ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	43.8	47	49	51	51.8	52.8	54.3
10	min	30	31.8	33.2	34.3	34.8	35.5	36.5
15	min	24	25.2	25.8	26.5	26.8	27.3	28
30	min	12.1	12.9	13.6	14.1	14.3	14.4	14.6
60	min	7.7	8.38	8.63	8.87	8.97	9.08	9.23
120	min	4.1	4.52	4.72	4.92	4.98	5.07	5.2
180	min	3.08	3.32	3.48	3.62	3.67	3.72	3.8
240	min	2.85	2.93	3	3.05	3.07	3.1	3.15
300	min	2.47	2.53	2.58	2.62	2.63	2.65	2.68
600	min	1.36	1.4	1.42	1.43	1.44	1.44	1.45
1200	min	0.69	0.705	0.718	0.728	0.732	0.737	0.743

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	23.1	26.2	27.8	29.1	29.6	30.5	31.7
10	min	16.1	17.3	18.1	18.6	18.9	19.2	19.8
15	min	12.6	13.1	13.5	13.8	14	14.1	14.3
30	min	6.54	7.05	7.28	7.47	7.56	7.68	7.85
60	min	4.02	4.25	4.41	4.52	4.58	4.63	4.71
120	min	2.26	2.38	2.45	2.49	2.51	2.54	2.57
180	min	1.65	1.74	1.79	1.82	1.83	1.85	1.88
240	min	1.35	1.4	1.44	1.47	1.49	1.51	1.53
300	min	1.1	1.16	1.21	1.25	1.27	1.28	1.29
600	min	0.667	0.675	0.682	0.687	0.69	0.694	0.698
1200	min	0.339	0.346	0.35	0.353	0.355	0.357	0.359

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Aug2020

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.