



CP702440 3.0V

Electrical characteristics

Typical values relative to cells stored for one year

Nominal capacity	1500mAh
Discharged capacity at 1mA,+25°C, 1.8V cut off.	
Nominal voltage	3.0V
Max. recommended continuous current	500mA
Discharged to 1.8V at 25°C permitting 50% of the Nominal capacity to be achieved	
Max. Pulse current	1000mA
15 seconds at 25°C drained with 50% of the nominal capacity, yield voltage reading above 1.8V. The value may vary with the pulse characteristics, the temperature and the cell's previous history	
Storage	Max 30°C
Operating temperature range	-40~+60°C
Weight	≈11 g

Warning

Don't charge crush,disassemble,expose contents to water,heat above 80°C,or may lead to explosion, burn or goods leakage.Discarded battery should be buried deeply to the ground.



Key features

- High and stable operating voltage
- Long shelf life Annual self-discharge rate lower than 2% at +20°C
- Hermetic Sealing
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

Main applications

- active tags
- Alarms or security equipment
- Smoke detector
- Memory backup
- Real time clock
- Professional electronic equipment
- Medical equipment
- .....


Discharge characteristics at 25°C

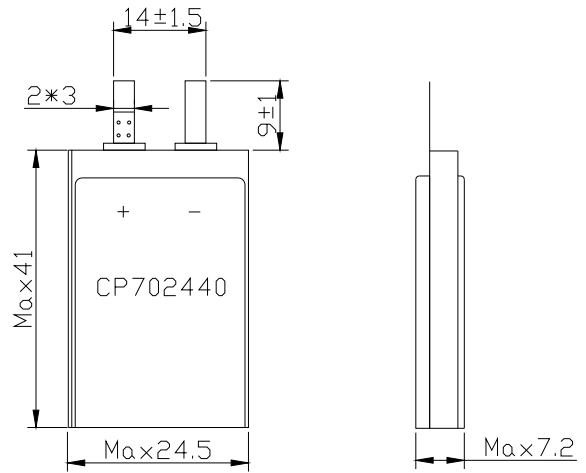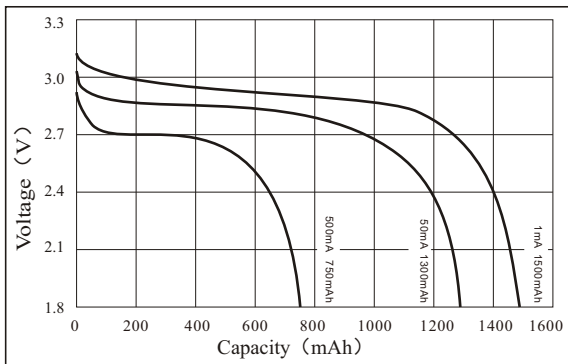


Dimensions in mm

Special terminal can be made according to customer's requirement


Voltage VS Current & Temperature Curve

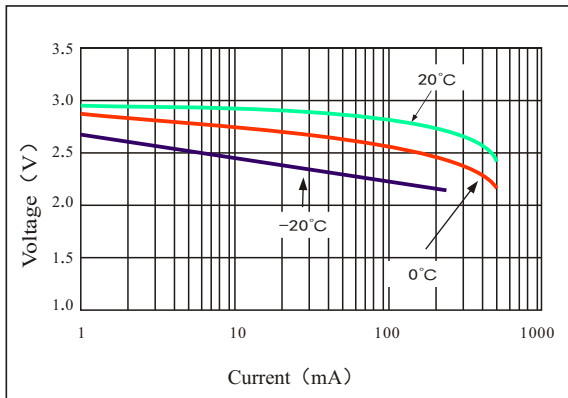

Capacity VS Current & Temperature Curve

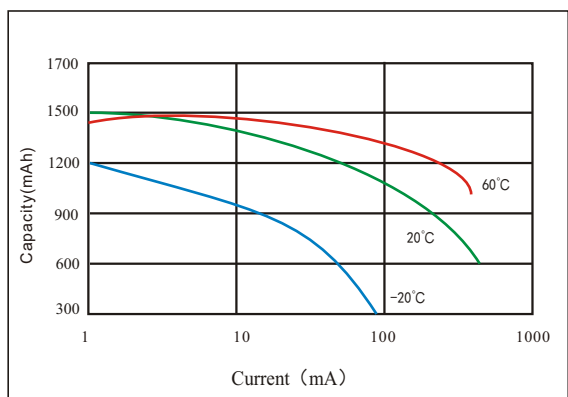

Storage characteristics

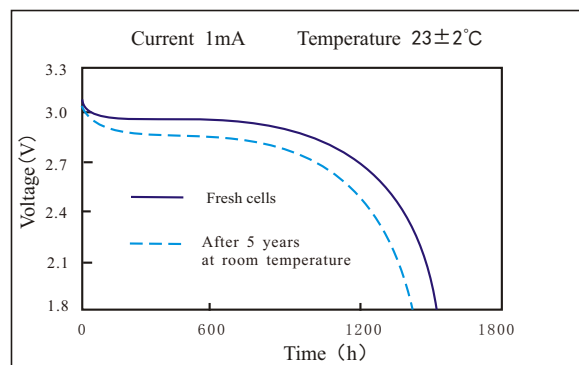

Data in this page is subject to change without notice and becomes contractual only after written confirmation by Fanso

Wuhan Fanso Technology Co.,LTD

Address: No.1 Sitai Industrial Park, Yongfeng Avenue, Hanyang District, Wuhan City, China.

Tel: 86 27 84452919

Fax: 86 27 84453116

Post Code: 430051

http://www.fansobattery.com E-mail: overseas@fansobattery.com