






1 2 3 4 5 6

A

B

C

D

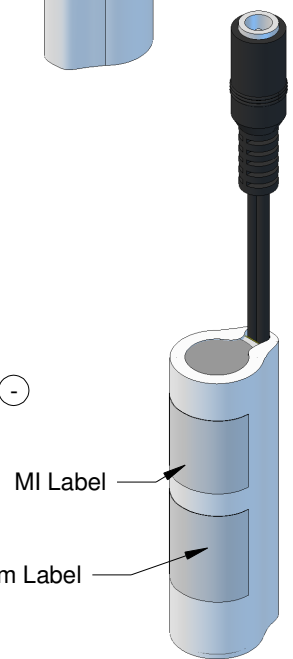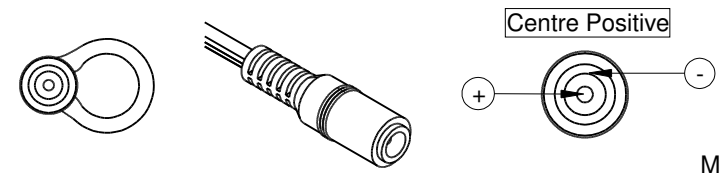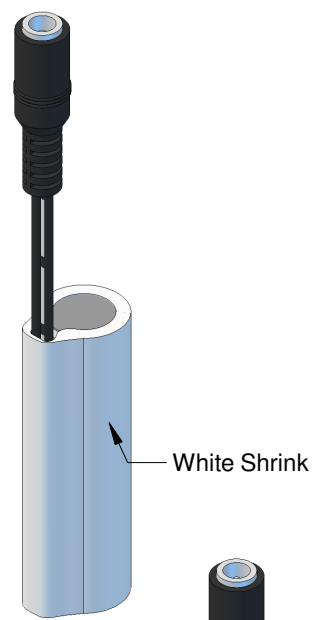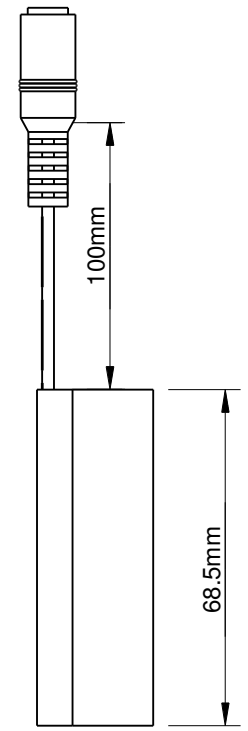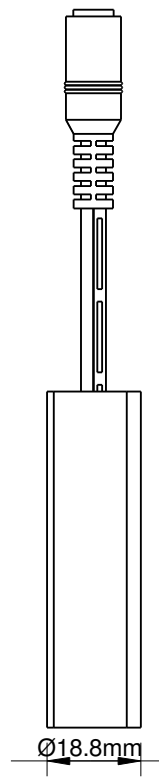

Technical Data

Safety Board (PCM)

PCM	MIPCM-1SXP6AL
Over Charge Detection Voltage	4.30V ± 0.05V
Over Charge Release Voltage	4.10V ± 0.05V
Over Discharge Detection Voltage	2.40V ± 0.10V
Over Discharge Release Voltage	3.00V ± 0.10V
Over Current Detection Current	8.0A ± 1.0A
Max Discharge Current	6A
Short Circuit Protection	200-500µs
Protection Circuit Resistance	≤40mΩ
PTC Resettable Fuse	N/A
Thermistor	N/A
Chemistry	Li-Ion
Configuration	N/A
Voltage	3.6V
Capacity	3.35Ah
Energy	12.06Wh
Weight	58g
Rated Discharge	0.65A
Max Discharge Continuous	PCM: 6A
	Cell: 4.875A
Charge Rate	1.625A
Operating Temperature Range	Charge: +10-+45°C
	Discharge: -20-+60°C
Charge Voltage	4.2V
Discharge End Voltage	2.5V
Connector	CE180 2.1mm(ID) x 5.5mm(OD) DC Jack
Suits Mating Connector	3P10-L1004-2.1mm



This drawing and the designs so represented are the copyright property of Master Instruments Pty Ltd. The drawing shall not be copied, loaned or issued without the express written permission of a duly authorised representative of Master Instruments Pty Ltd.

PART NO	RL1019	STOCK CODE	88003-102S	RevNo	0
CELL TYPE	NCR18650B	RECOMMENDED CHARGER		DATE	12/09/2017
				PAGE	1 OF 1

1 2 3 4 5 6